


AIRGUN 40 SC

AIRGUN 40 SC...

The Airgun 40 SC (Self Contained) is designed to exceed current U.S. Air Force requirements for a handheld pneumatic aircraft skin penetrator. It is an ideal crash rescue tool. Carrying its own limited air supply, a firefighter can rapidly insert several penetrator/applicator nozzles depending on the location and spread of fire or fuel. These penetrator/applicator nozzles will flow water, AFFF solutions and Halon.

When the self contained air supply is exhausted, the air supply assembly can be quickly detached in favor of another air source. The firefighter now has the full benefit of a standard Airgun 40 to continue rescue operations.

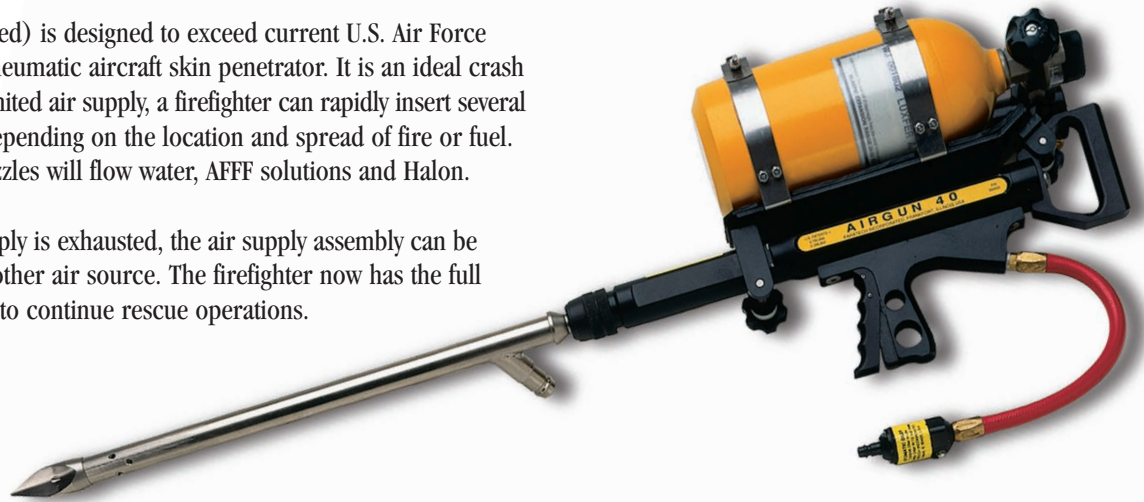

AIRGUN 40 SC KIT



ORDERING INFORMATION

- 22-550006 KIT, Airgun 40 SC, consisting of the following:
- 22-550000 Airgun 40, with Inline Oiler
- 22-800013 Working Air Cylinder 13 cu ft (368.2 L) with Valve and Gauge
- 22-550106 Cylinder Rack, self-contained unit
- 22-895400 Pressure Regulator Piston Type
6,000-300 PSI (413.7-20.7 Bar)
- 22-895330 Pressure Regulator 6,000-175 PSI (413.7-12.1 Bar)
- 22-890520 Air Hose, 3/8 in (9.5 mm) dia. X 32 ft (9.8 m) Yellow
- 22-550291 Oil, lubricating, 4 oz (113 g)
- 22-550259 Tool, retainer service
- 22-550094 Hex Key 7/32 in (0.6 cm)
- 22-550099 Hex Key 3/16 in (0.5 cm)
- 22-550095 Manual, Operating and Instruction
- 22-700235 Goggles, plastic safety
- 22-550310 Case, Carry and Storage
- 22-550244 Driver for Neoprene Plug
- 22-550246 Neoprene Plug 4 in (10.2 cm) LG
3/4 in - 1.5 in (1.9-3.8 cm) dia.
- 22-550252 Bit, 10 in (25.4 cm) Curved metal cutter,
1 in (2.5 cm) wide
- 22-550256 Bit, 11 in (27.9 cm) Dual Cutter with Bullpoint
- 22-550260 Bit, 10 in (25.4 cm) Heavy duty metal cutter
0.5 in (1.3 cm) depth of cut
- 22-550262 Bit, 11 in (27.9 cm) Bullpoint
- 22-550264 Bit, 11 in (27.9 cm) Chisel 3/4 in (1.9 cm) Wide
- 22-550270 Bit, Deep 1.2 in (3.1 cm) Panel cutter for metals
- 22-550272 Bit, Deep 1.2 in (3.1 cm) Panel Cutter with
Relief for Aircraft Windows
- 22-550274 Bit, 20 in (50.8 cm) Spade, 3 in (7.6 cm) wide
- 22-550240 Bit, 6 in (15.2 cm) Piercing Applicator
3/4 in (1.9 cm) O.D. X 1/2 in (1.3 cm)
- 22-550250 Bit, 14 in (35.6 cm) Piercing Applicator 1 in (2.5 cm)
- 22-550320 Coupling, 1 1/2 in NH

TECHNICAL DATA

Length (without bit)	23 in (58.4 cm)
Width	13 in (33.0 cm)
Thickness	9.8 in (24.9 cm)
Weight (Airgun SC without bit)	19.6 lb (8.9 kg)
Air Pressure Range	40-200 PSI (2.8-13.8 Bar)
Air Consumption at 100 PSI (6.9 Bar)	5.2 CFM (147.3 L/min)
Blows/Minute (approx.)	600
Power Output @ 200 PSI	40 lbf • ft (5.5 N • m)
Power Output @ 50 PSI	6 lbf • ft (.83 N • m)
Kit Weight	77 lb (35 kg)
Kit Dimensions	32 in long (81.3 cm) 22 in wide (55.9 cm) 12 in high (30.5 cm)
Shank Size	0.4 in (1.0 cm)

Paratech Incorporated

P.O. Box 1000, Frankfort, IL 60423 USA
 Customer Service: 800.435.9358
 Phone: 815.469.3911 Fax: 815.469.7748
 www.paratech.us E-mail: paratech@paratech.us

Paratech Europe, Branch of Paratech Inc.

P.O. Box 174, 5260 Odense S, Denmark
 Phone: +45.66.11.24.22 Fax: +45.66.11.24.32
 Customer Service: 800.435.9358
 www.paratech.us Email: paratech@paratech.dk

